YMING


HOSE PUMP

YM-100 Data sheet

Technical Parameter	Model: YM-100
Power	11kw/15kw
Max Outlet Pressure	10 bar
Recommend Speed	30 r/min
Fluid Temperature Range	-10℃~80℃
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Cast Iron
Weight	1100 kgs
Connection	DN100 FLANGE
Flow Rate Per Rotation	20 l/rev



Features

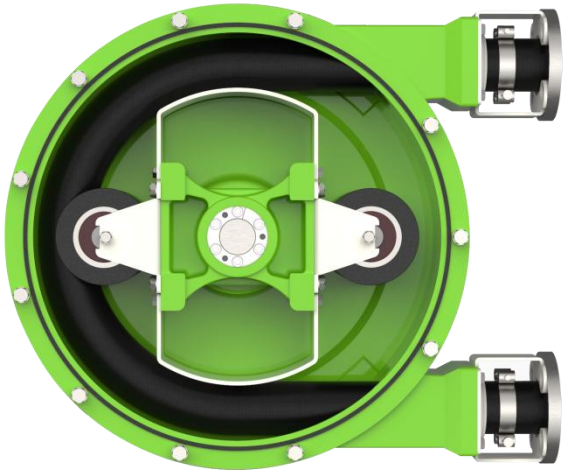


Easy Operation Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime

Wide Application Transport corrosive slurry, acid and gaseous fluids, as easy as transport water

Not Block Can operate in a positive or negative direction, safely remove the blockage


Energy Saving and Efficient The Roller design saves nearly 30% energy compared to the shoe type pump




Capable of Dry Running No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection

Durable Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance curve:

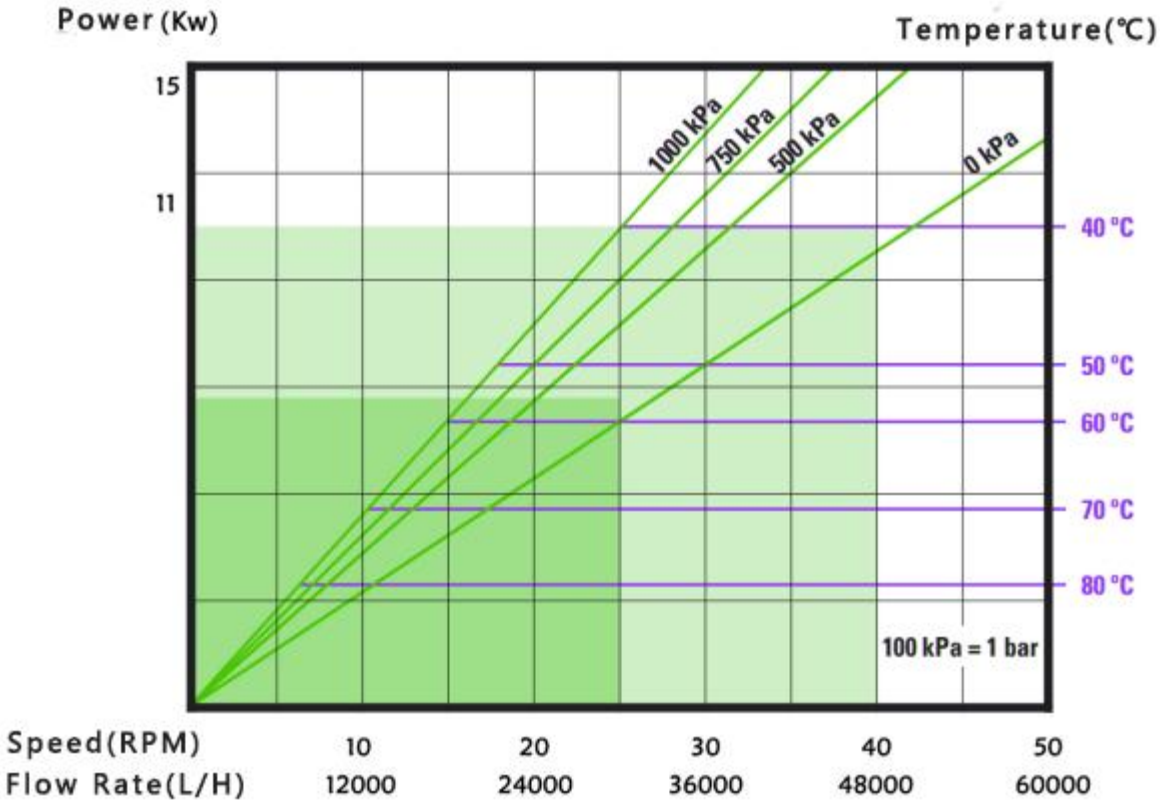

Dimension: mm

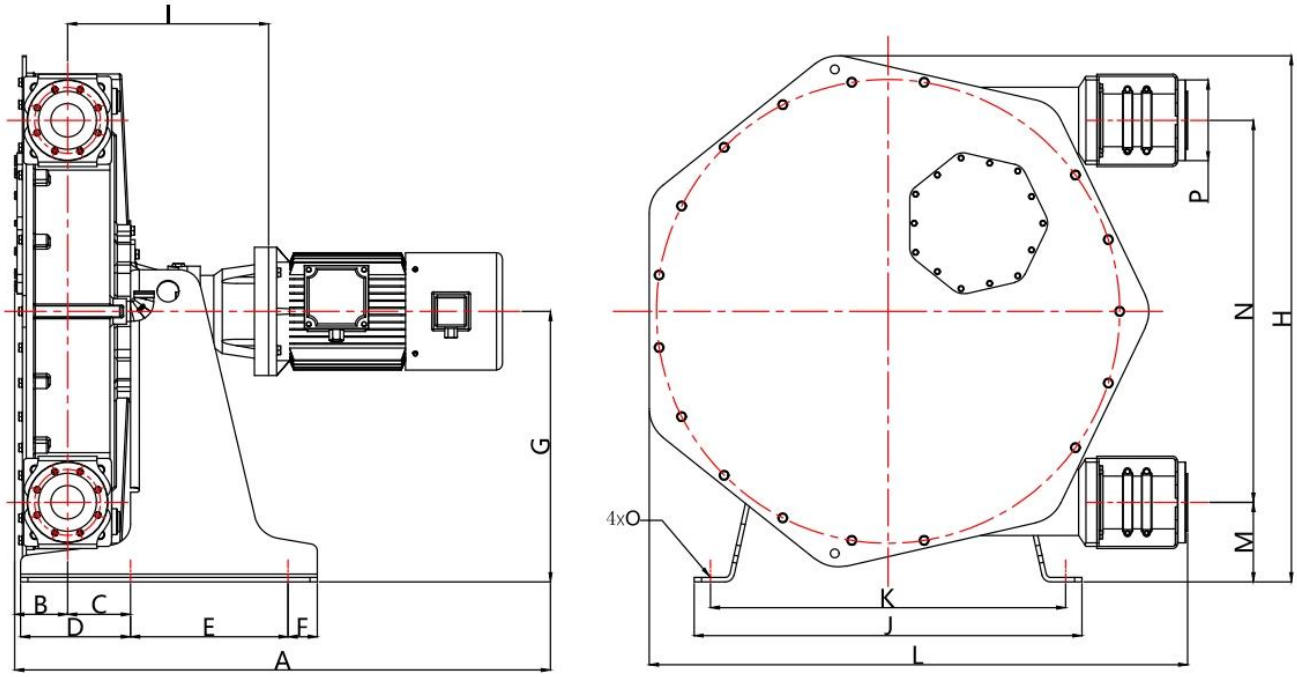

A	B	C	D	E	F	G	H
1462.8	144.5	172	300	430	80	737.6	1434.9
I	J	K	L	M	N	O	P
549	1060	970	1470	216.6	1042	Φ22	DN100