YMING


HOSE PUMP

YM-125 Data sheet

Technical Parameter	Model: YM-125
Power	22 kw
Max Outlet Pressure	10 bar
Recommend Speed	30 r/min
Fluid Temperature Range	-10℃~80℃
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Cast Iron
Weight	2200 kgs
Connection	DN125 FLANGE
Flow Rate Per Rotation	33.3 l/rev



Features

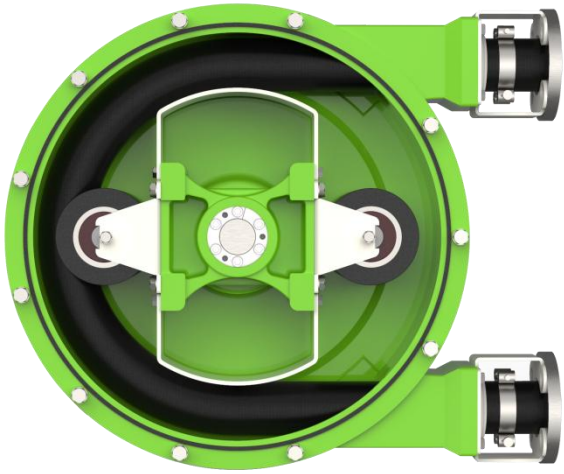


Easy Operation Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime

Wide Application Transport corrosive slurry, acid and gaseous fluids, as easy as transport water

Not Block Can operate in a positive or negative direction, safely remove the blockage


Heavy-Duty Application The shoe design used in high pressure and heavy-duty application up to 16bar




Capable of Dry Running No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection

Durable Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance curve:

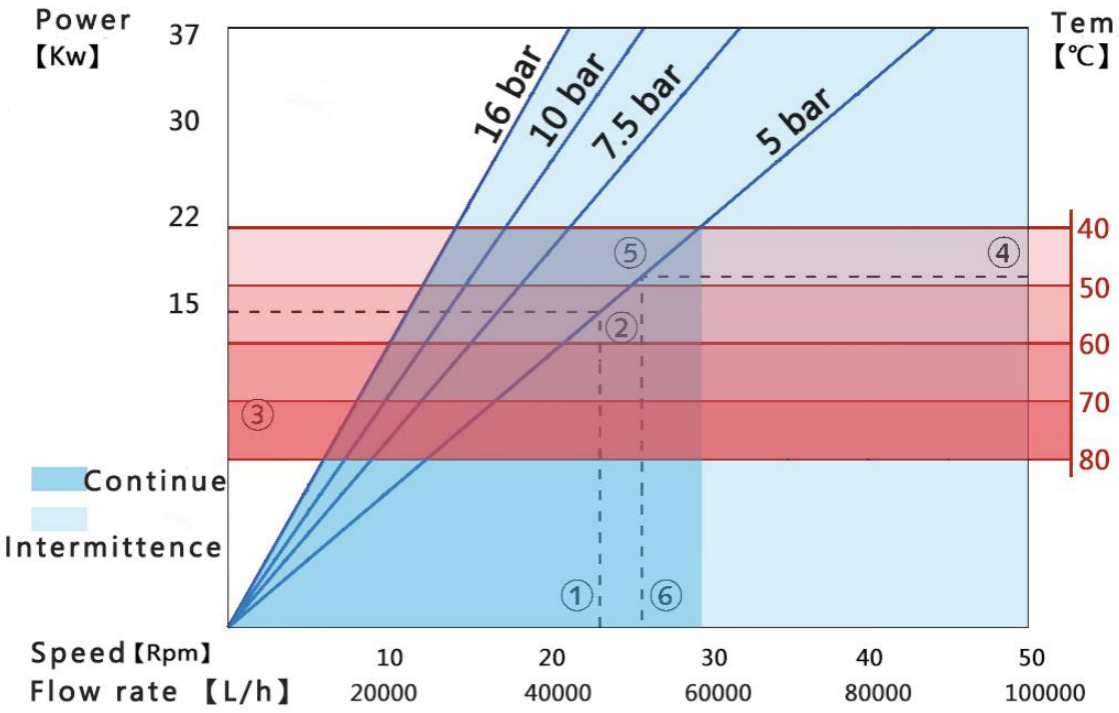

Dimension: mm

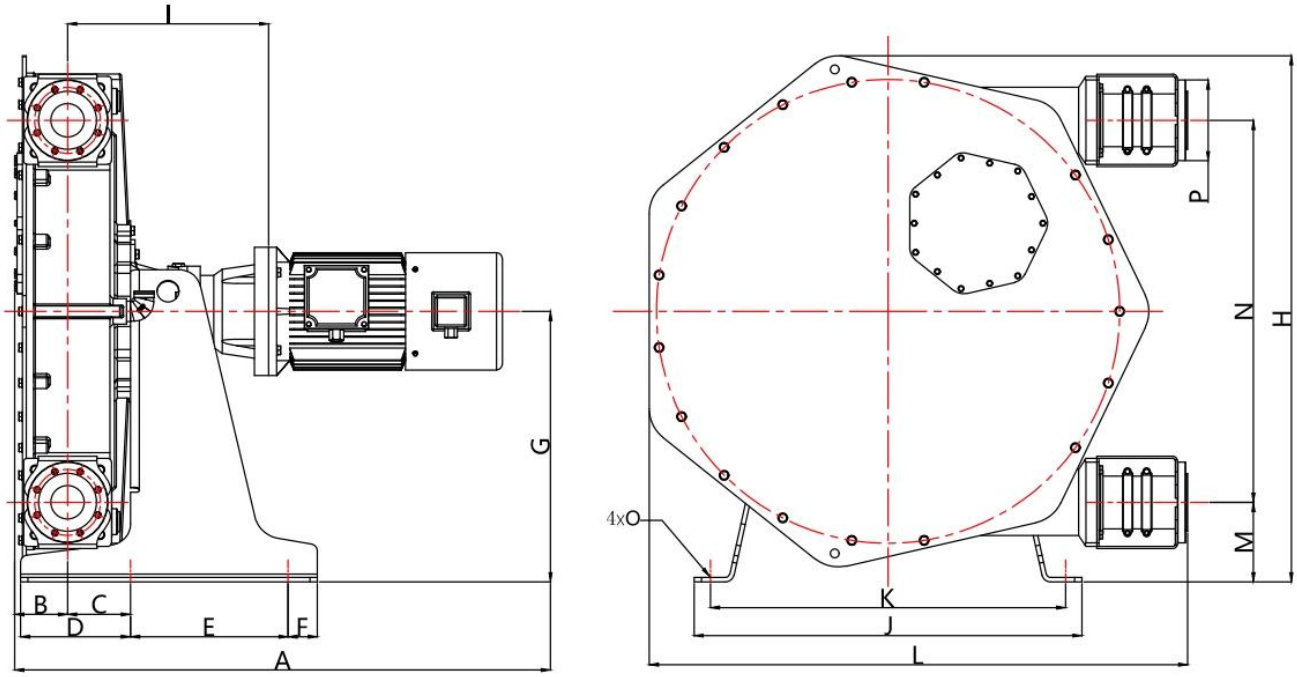

A	B	C	D	E	F	G	H
1587-1712	155	133	288	805	90	950	1750
I	J	K	L	M	N	O	P
938	1168	1068	1777	315	1270	Φ22	DN125

Shanghai Yming Pump Co.,Ltd
Whatsapp: +86 133 816 26546
Web: www.ym-pump.com
All rights deserved
Email: sales@ymingpump.com