YMING


Stainless Steel Hose Pump

YM 20 DATA SHEET

Technical Parameter	Model: YM-20
Power	0.55/0.75 kw
Max Outlet Pressure	12 bar
Recommend Speed	45 r/min
Fluid Temperature Range	-10℃~80℃
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Aluminum, Stainless Steel 316L
Weight	40 kgs
Flow Rate Per Rotation	0.15 l/rev
Size/Connection	3/4" Pagoda/Flange



Features

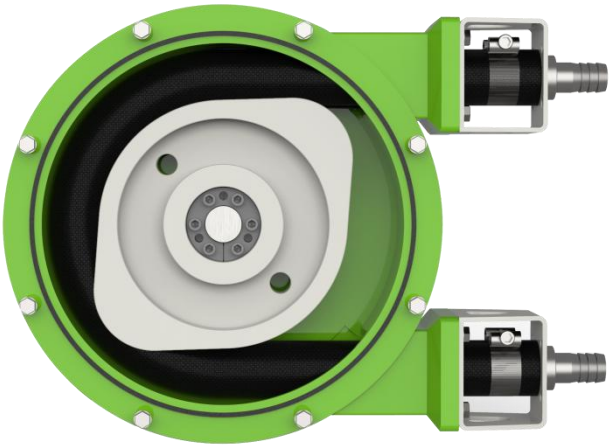


Easy Operation Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime

Wide Application Transport corrosive slurry, acid and gaseous fluids, as easy as transport water

Not Block Can operate in a positive or negative direction, safely remove the blockage


Energy Saving and Efficient The Roller design saves nearly 30% energy compared to the shoe type pump



Capable of Dry Running No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection


Durable Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance Curve:

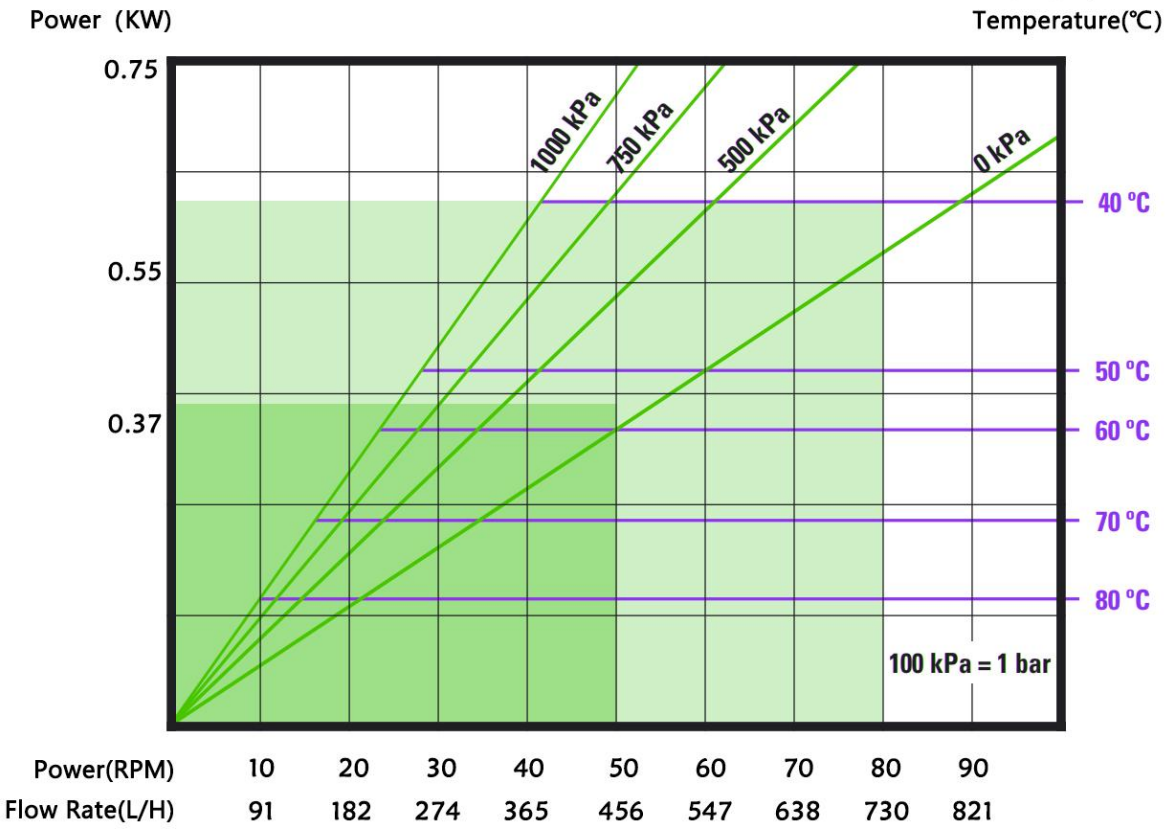

Power(RPM)	10	20	30	40	50	60	70	80	90
Flow Rate(L/H)	91	182	274	365	456	547	638	730	821

Dimension: mm

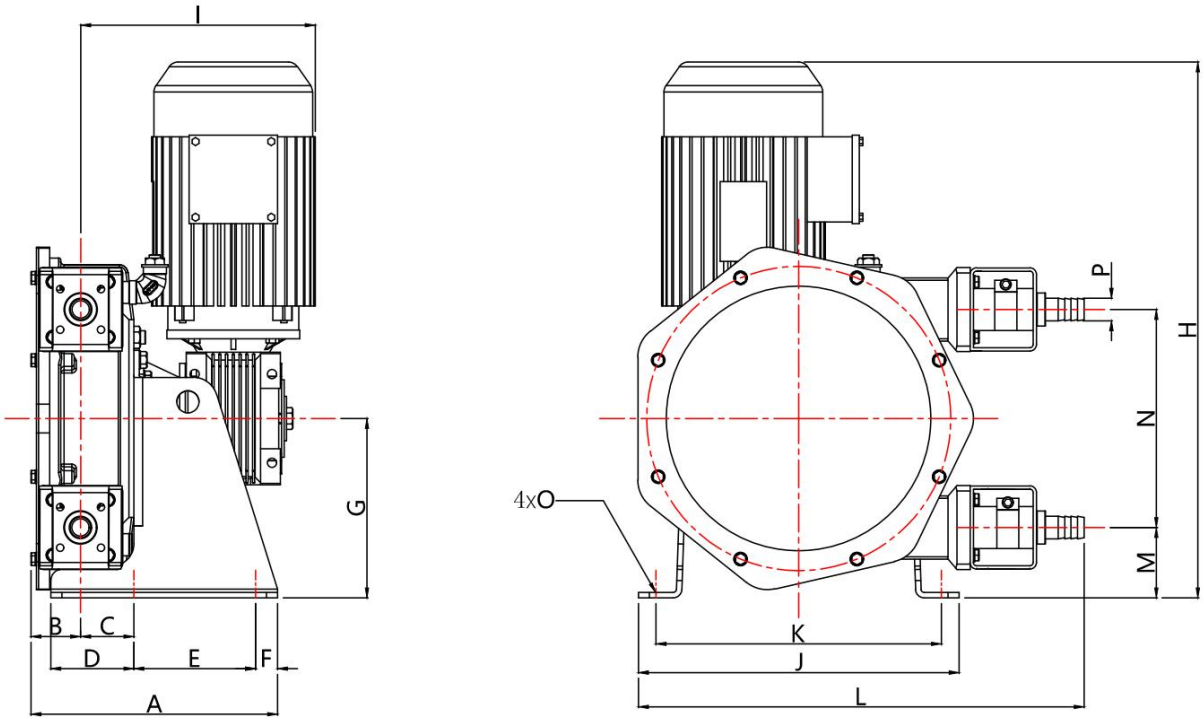

A	B	C	D	E	F	G	H
223	45	48	75	110	20	162.1	484.4
I	J	K	L	M	N	O	P
212	290	258	403	63.6	197	Φ12	20.4

Shanghai Yming Pump Co.,Ltd
Web: www.ym-pump.com
All rights deserved
Email: sales@ymingpump.com