
Yming


HOSE PUMP

YM 40 DATA SHEET

Technical Parameter	Model: YM-40
Power	2.2 kw
Max Outlet Pressure	10 bar
Recommend Speed	40 r/min
Fluid Temperature Range	-20℃~80℃
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Cast Iron
Weight	180 kgs
Flow Rate Per Rotation	1.33 l/rev
Size/Connection	1-1/2" Flange

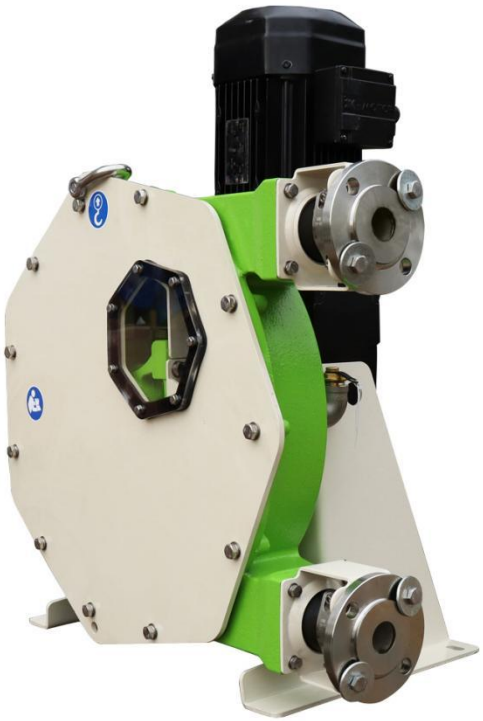

Features

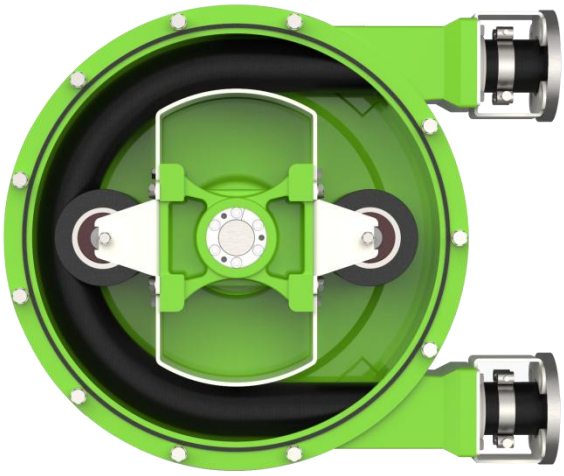


Easy Operation Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime

Wide Application Transport corrosive slurry, acid and gaseous fluids, as easy as transport water

Not Block Can operate in a positive or negative direction, safely remove the blockage


Energy Saving and Efficient The Roller design saves nearly 30% energy compared to the shoe type pump



Capable of Dry Running No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection


Durable Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance Curve:

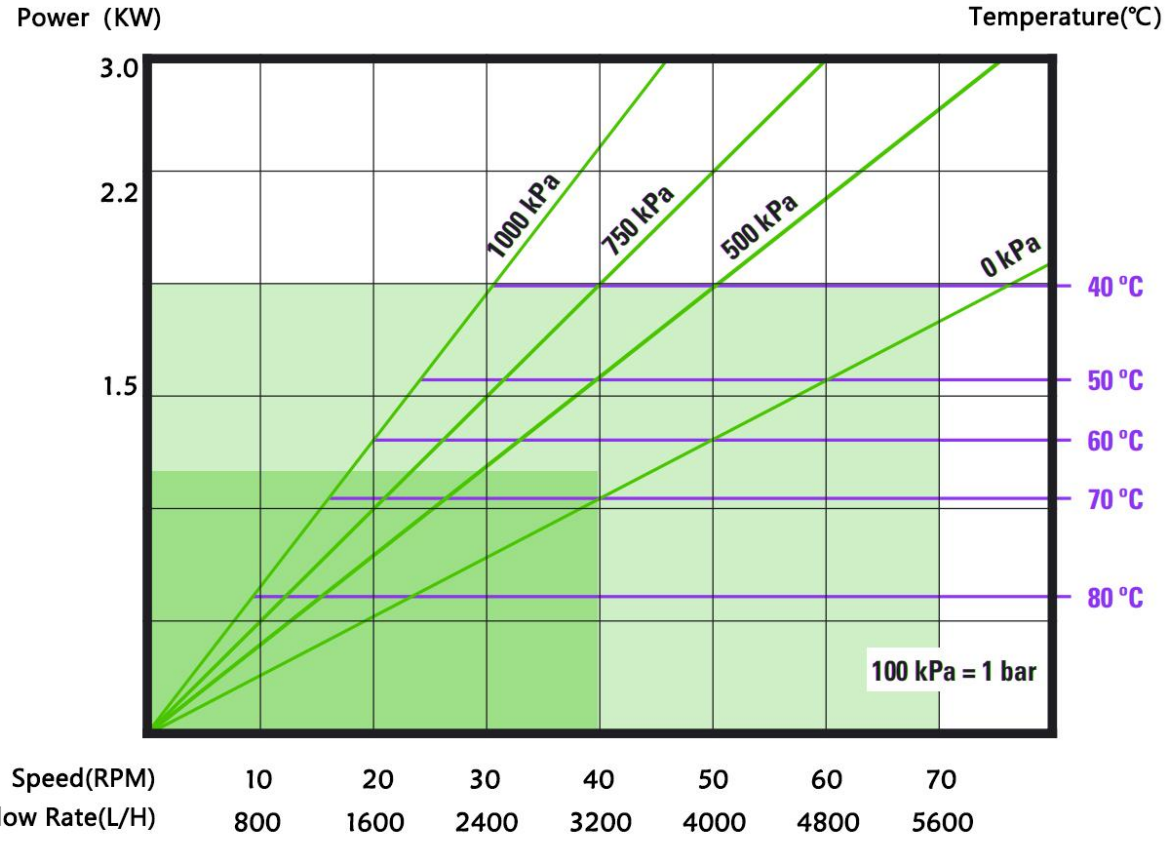

Speed(RPM)	10	20	30	40	50	60	70
Flow Rate(L/H)	800	1600	2400	3200	4000	4800	5600

Dimension: mm

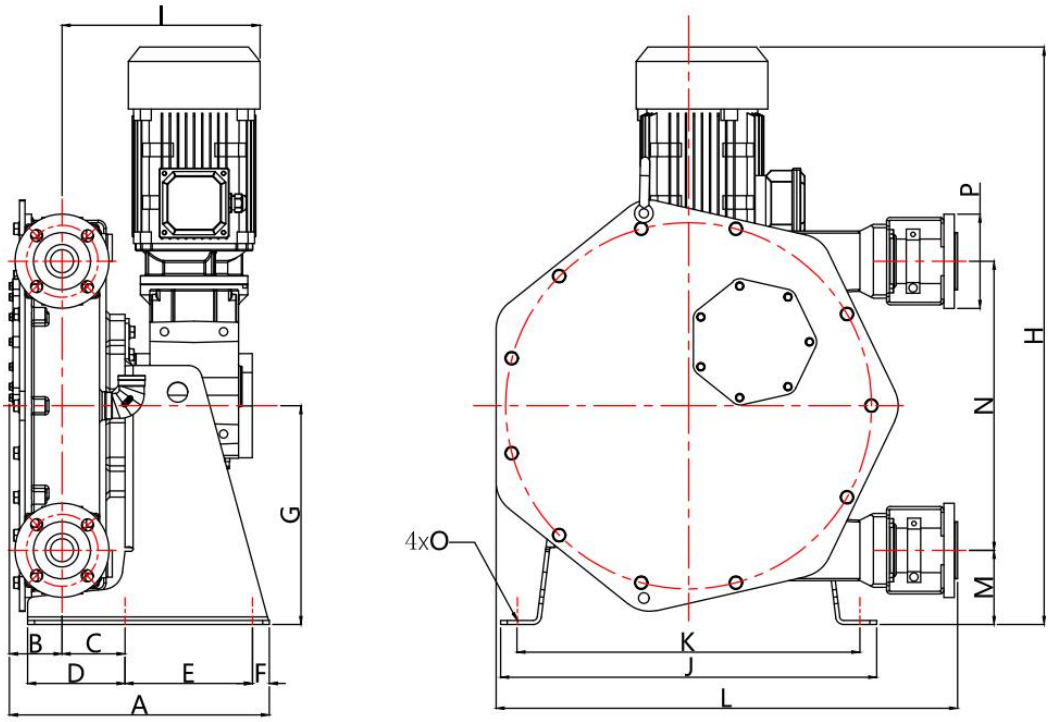

A	B	C	D	E	F	G	H
405.8	587.3	93.5	174	190	25	325.3	988.3
I	J	K	L	M	N	O	P
325.3	560	510.6	687.1	110.3	430	Φ14	DN40

Shanghai Yming Pump Co.,Ltd
Web: www.ym-pump.com
All rights deserved
Email: sales@ymingpump.com