



Technical Parameter	Model: YM-40
Power	2.2 kw
Max Outlet Pressure	10 bar
Recommend Speed	40 r/min
Fluid Temperature Range	-20°C~80°C
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Cast Iron
Weight	180 kgs
Flow Rate Per Rotation	1.33 l/rev
Size/Connection	1-1/2" Flange




Features

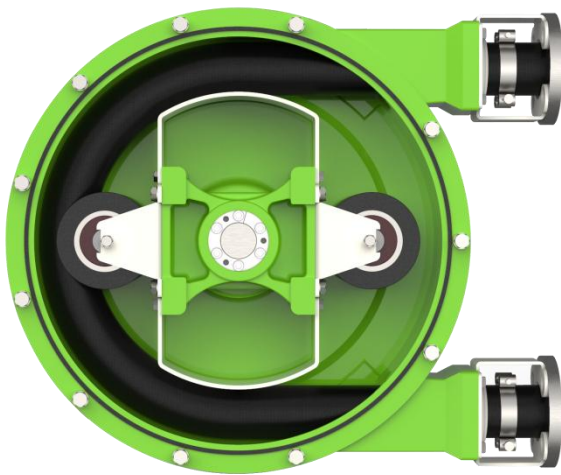


- ➔ **Easy Operation** Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime
- ➔ **Wide Application** Transport corrosive slurry, acid and gaseous fluids, as easy as transport water
- ➔ **Not Block** Can operate in a positive or negative direction, safely remove the blockage
- ➔ **Energy Saving and Efficient** The Roller design saves nearly 30% energy compared to the shoe type pump
- ➔ **Capable of Dry Running** No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection
- ➔ **Durable** Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance Curve:

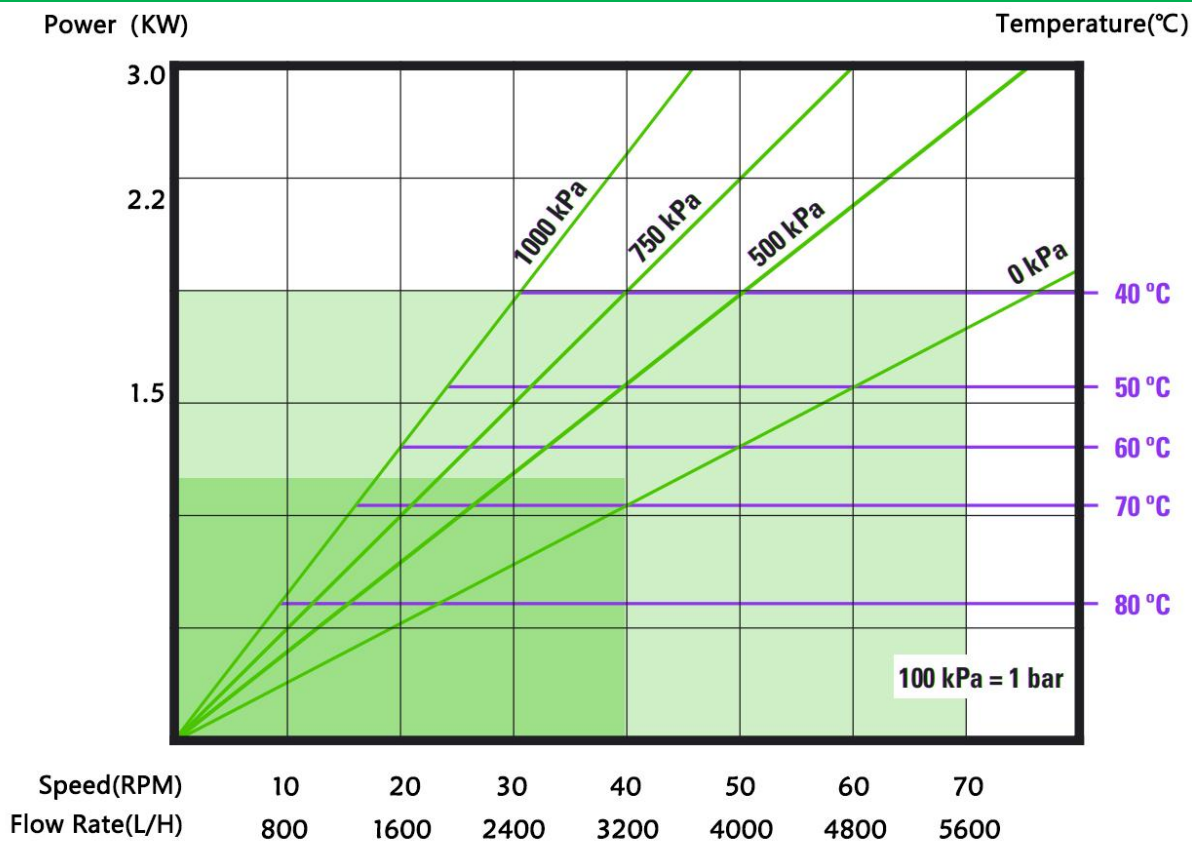

Dimension: mm

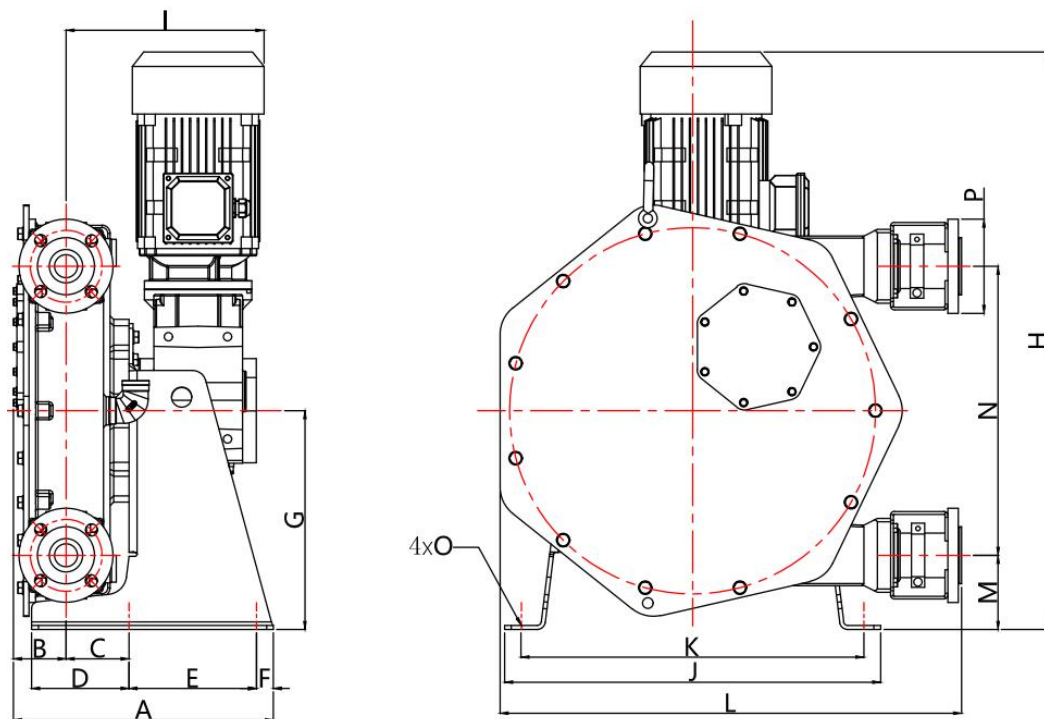

A	B	C	D	E	F	G	H
405.8	587.3	93.5	174	190	25	325.3	988.3
I	J	K	L	M	N	O	P
325.3	560	510.6	687.1	110.3	430	Φ14	DN40

Shanghai Yming Pump Co.,Ltd

Web: www.ym-pump.com

All rights reserved

Email: sales@ymingpump.com