Yming


HOSE PUMP

YM 80 DATA SHEET

Technical Parameter	Model: YM-80
Power	7.5kw/11 kw
Max Outlet Pressure	10 bar
Recommend Speed	30 r/min
Fluid Temperature Range	-10℃~80℃
Hose Material	NR EPDM NBR CSM FOOD GRADE HOSE
Pumpbody Material	Cast Iron
Weight	600 kgs
Flow Rate Per Rotation	10 l/rev
Size/Connection	3" Flange



Features

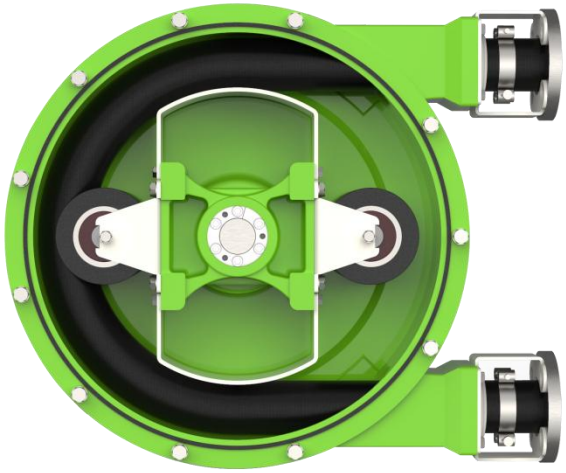


Easy Operation Easy to assemble, operate and Maintain, Save maintenance cost and reduce downtime

Wide Application Transport corrosive slurry, acid and gaseous fluids, as easy as transport water

Not Block Can operate in a positive or negative direction, safely remove the blockage


Energy Saving and Efficient The Roller design saves nearly 30% energy compared to the shoe type pump




Capable of Dry Running No auxiliary parts Required, no one-way valve required, Sealed water flush System and dry running protection

Durable Peristaltic hoses imported from Sweden Saves hose consumption and facilitates installation

Performance Curve:

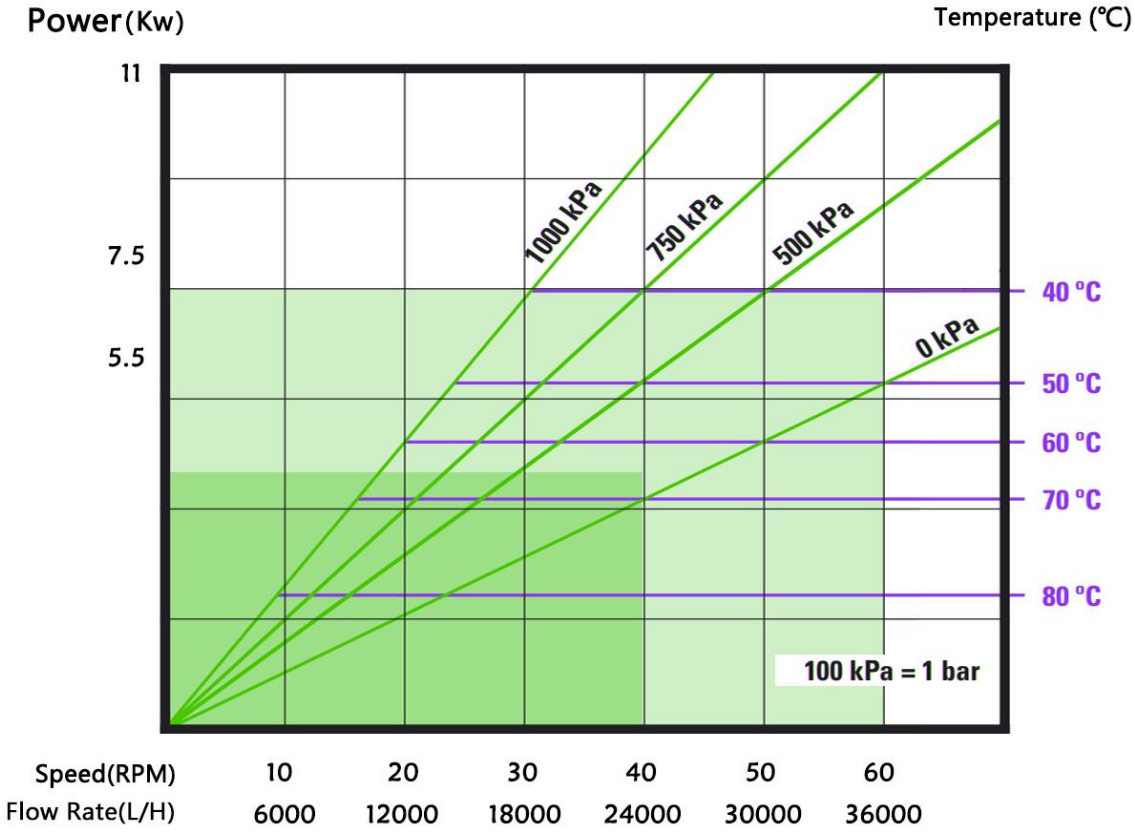

Dimension: mm

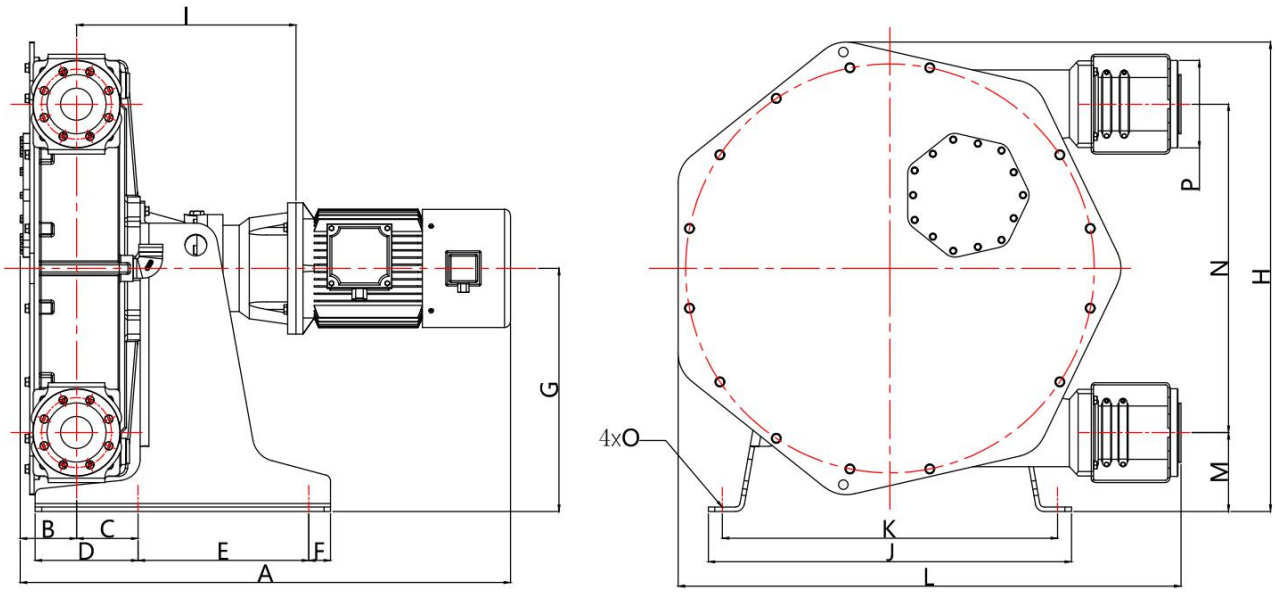

A	B	C	D	E	F	G	H
1120	128.5	140.5	235	390	50	555.1	1072.1
I	J	K	L	M	N	O	P
501.5	830.1	766	1148.8	180.1	750	Φ20	DN80